

Configuring Folders Within a Content Root


content roots

In this section:

- [Marking directories via project structure dialog](#)
- [Marking directory via context menu](#)
- [Unmarking directories](#)

To mark directories under the content root


1. [Open the Project Structure settings](#).
2. In the [Sources tab](#), click the desired content root. The directories under this content root are displayed as a tree view in the right-hand pane.
3. Select the directory you want to mark and do one of the following:
 - Click one of the icons on top to assign the desired status to this directory.
 - Choose the corresponding status command on the context menu of the directory.

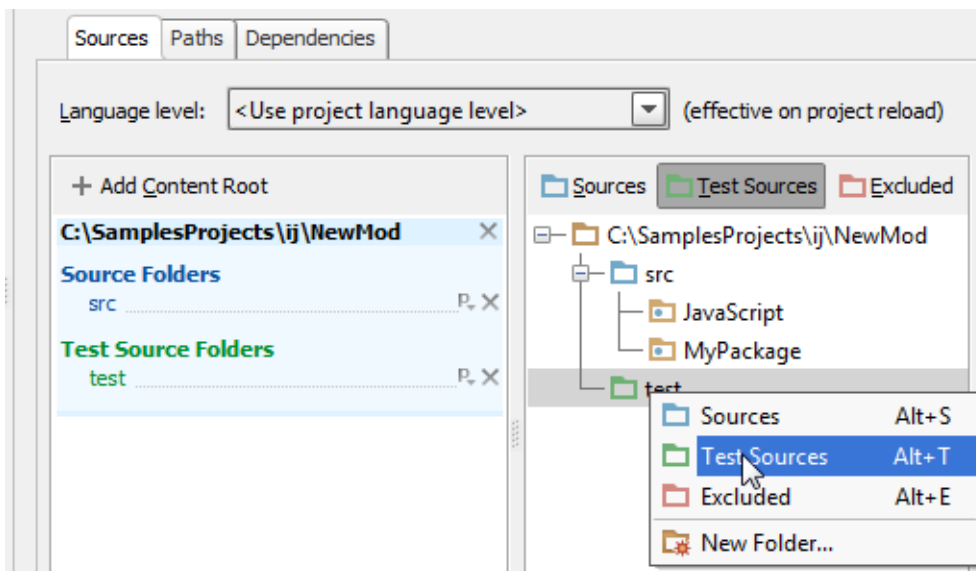


To mark directories using context menu

1. Right-click the desired directory in the [Project Tool Window](#).
2. On the context menu, point to **Mark Directory As** node.
3. Choose **Mark as <directory status>**.

To return a folder to its regular status, do one of the following:

- In the Project Structure:
 - Select the directory in question in the list of folders under the content root, and click :

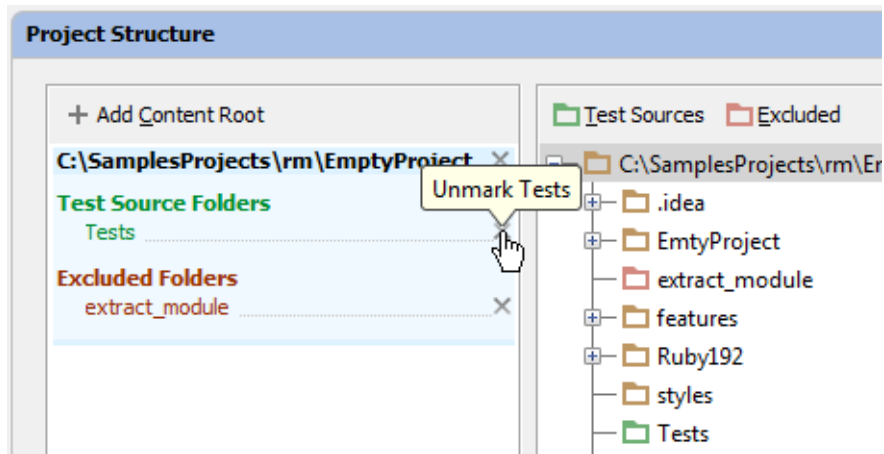

- Click the folder's status icon once more.
 - Choose the corresponding command on the context menu of the directory.
- In the [Project Tool Window](#), right-click the desired directory, point to **Mark Directory As** node, and then choose **Unmark as <directory status>**.

See Also

Concepts:

- [Content Root](#)

Procedures:

- [Configuring Content Roots](#)

Reference:

- [Project Structure Dialog](#)
- [Sources Tab](#)
- [Paths Tab](#)

Web Resources:

- [Developer Community](#) 