









## Configuring Module Roots

The module root settings enable you to define production and test roots within the module contents. Also, you can exclude certain roots from parsing, compilation and testing.

### To configure module roots


1. [Open module settings dialog](#).
2. Select the desired module, and click the **Sources** tab.
3. To add content roots, click the **Add Root** button  and locate the desired roots in the **Select content root directory** dialog.
4. Mark the roots or their subfolders as Source, Test or Excluded. To do it, select a folder in the module tree-view, and click one of the following buttons:
  -  for a [source root](#).
  -  for a [test root](#).
  -  for an [excluded root](#).


To unmark the selected roots, use the button , or the toggle buttons , , or .

5. Define absolute or relative paths to the external resources of the modules, choosing **Absolute** or **Relative** radio-buttons.

You can use the [Compiler](#) settings to exclude certain roots from compilation, but still keep them accessible for editing.

### To remove a content root

1. [Open the Project Structure](#) settings.
2. In the [Sources](#) tab, select the content root to be deleted.
3. Click the **Remove Content Entry** button :

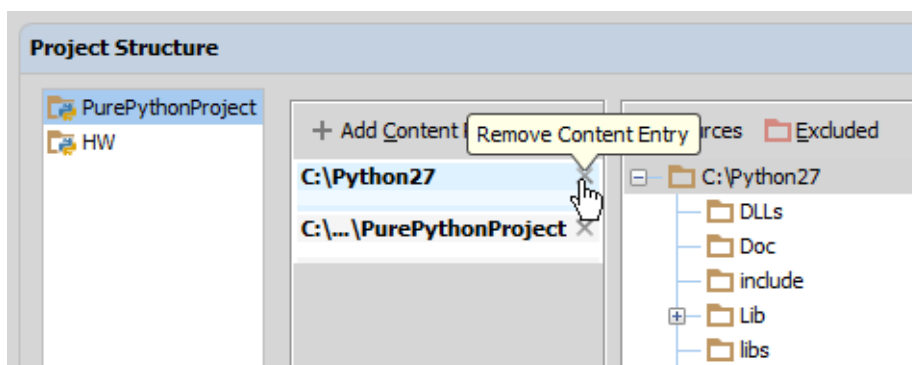

4. Confirm deletion.

### See Also

#### Concepts:

- [Content Root](#)

#### Reference:

- [Modules](#)

## Web Resources:

- [Developer Community](#) □