

## Running Gant Targets

With IntelliJ IDEA, it is possible to run an entire Gant script, or each target separately, using the temporary run/debug configurations. Temporary run configuration for a script or target can be saved as a permanent one.


Results display in the [Run tool window](#).

### To run a Gant script

- Select the desired Gant script, and [run it](#) with the default run/debug configuration.

### To run a Gant target

1. Open the desired Gant script in the editor, and place the caret at the Gant target to be executed.
2. On the context menu, choose **Run "<script><target>"**

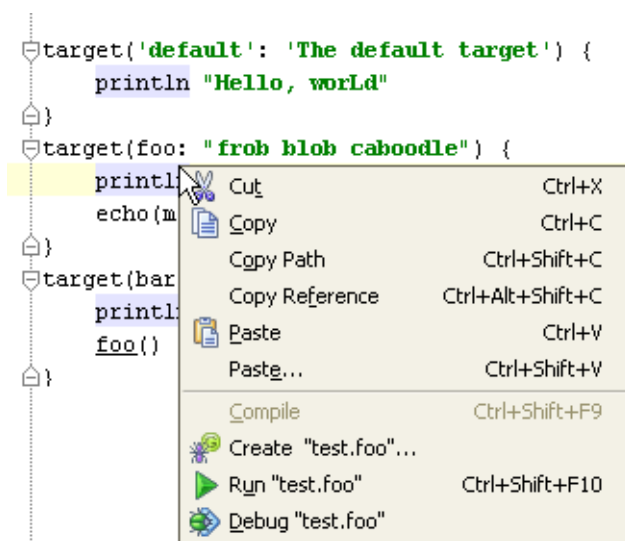

### See Also

Concepts:

- [Run/Debug Configuration](#)

Procedures:

- [Groovy](#)
- [Running](#)
- [Creating and Editing Run/Debug Configurations](#)

Reference:

- [Run/Debug Configuration. Gant](#)

Web Resources:

- [Developer Community](#)